


Wiring Diagram: Regis H-1-9 (in kit) with Spider W5-NET

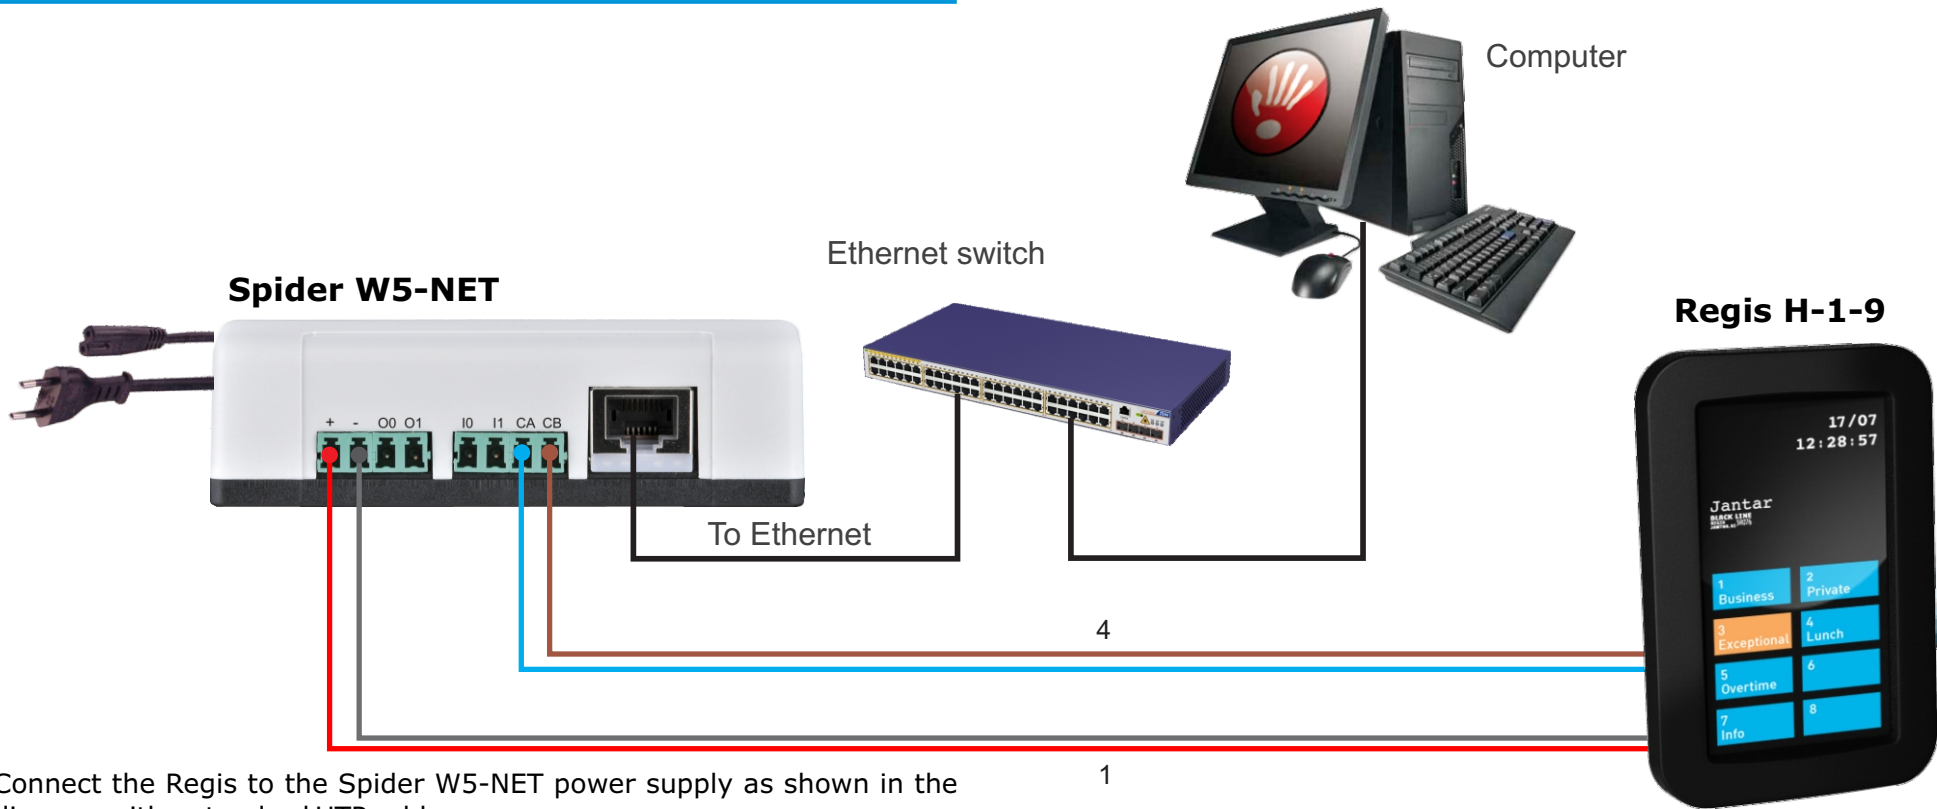

Connect the Regis to the Spider W5-NET power supply as shown in the diagram with a standard UTP cable.

For distances greater than 25m, use one twisted pair of UTP cable for each pole (+ and -).

The cable length between the power supply and the Regis should not exceed 50m. Connect the Spider W5-NET to the mains power 110-230V AC with the enclosed power cord.

CONNECTION CABLE

| Wire | Colour | Description | Spider Connector |
|------|------------|-------------|------------------|
| 1 | Red | 9-14V DC | + |
| 2 | Gray/Black | GND | - |
| 3 | Light Blue | RS-485 CA | CA |
| 4 | Brown | RS-485 CB | CB |

